


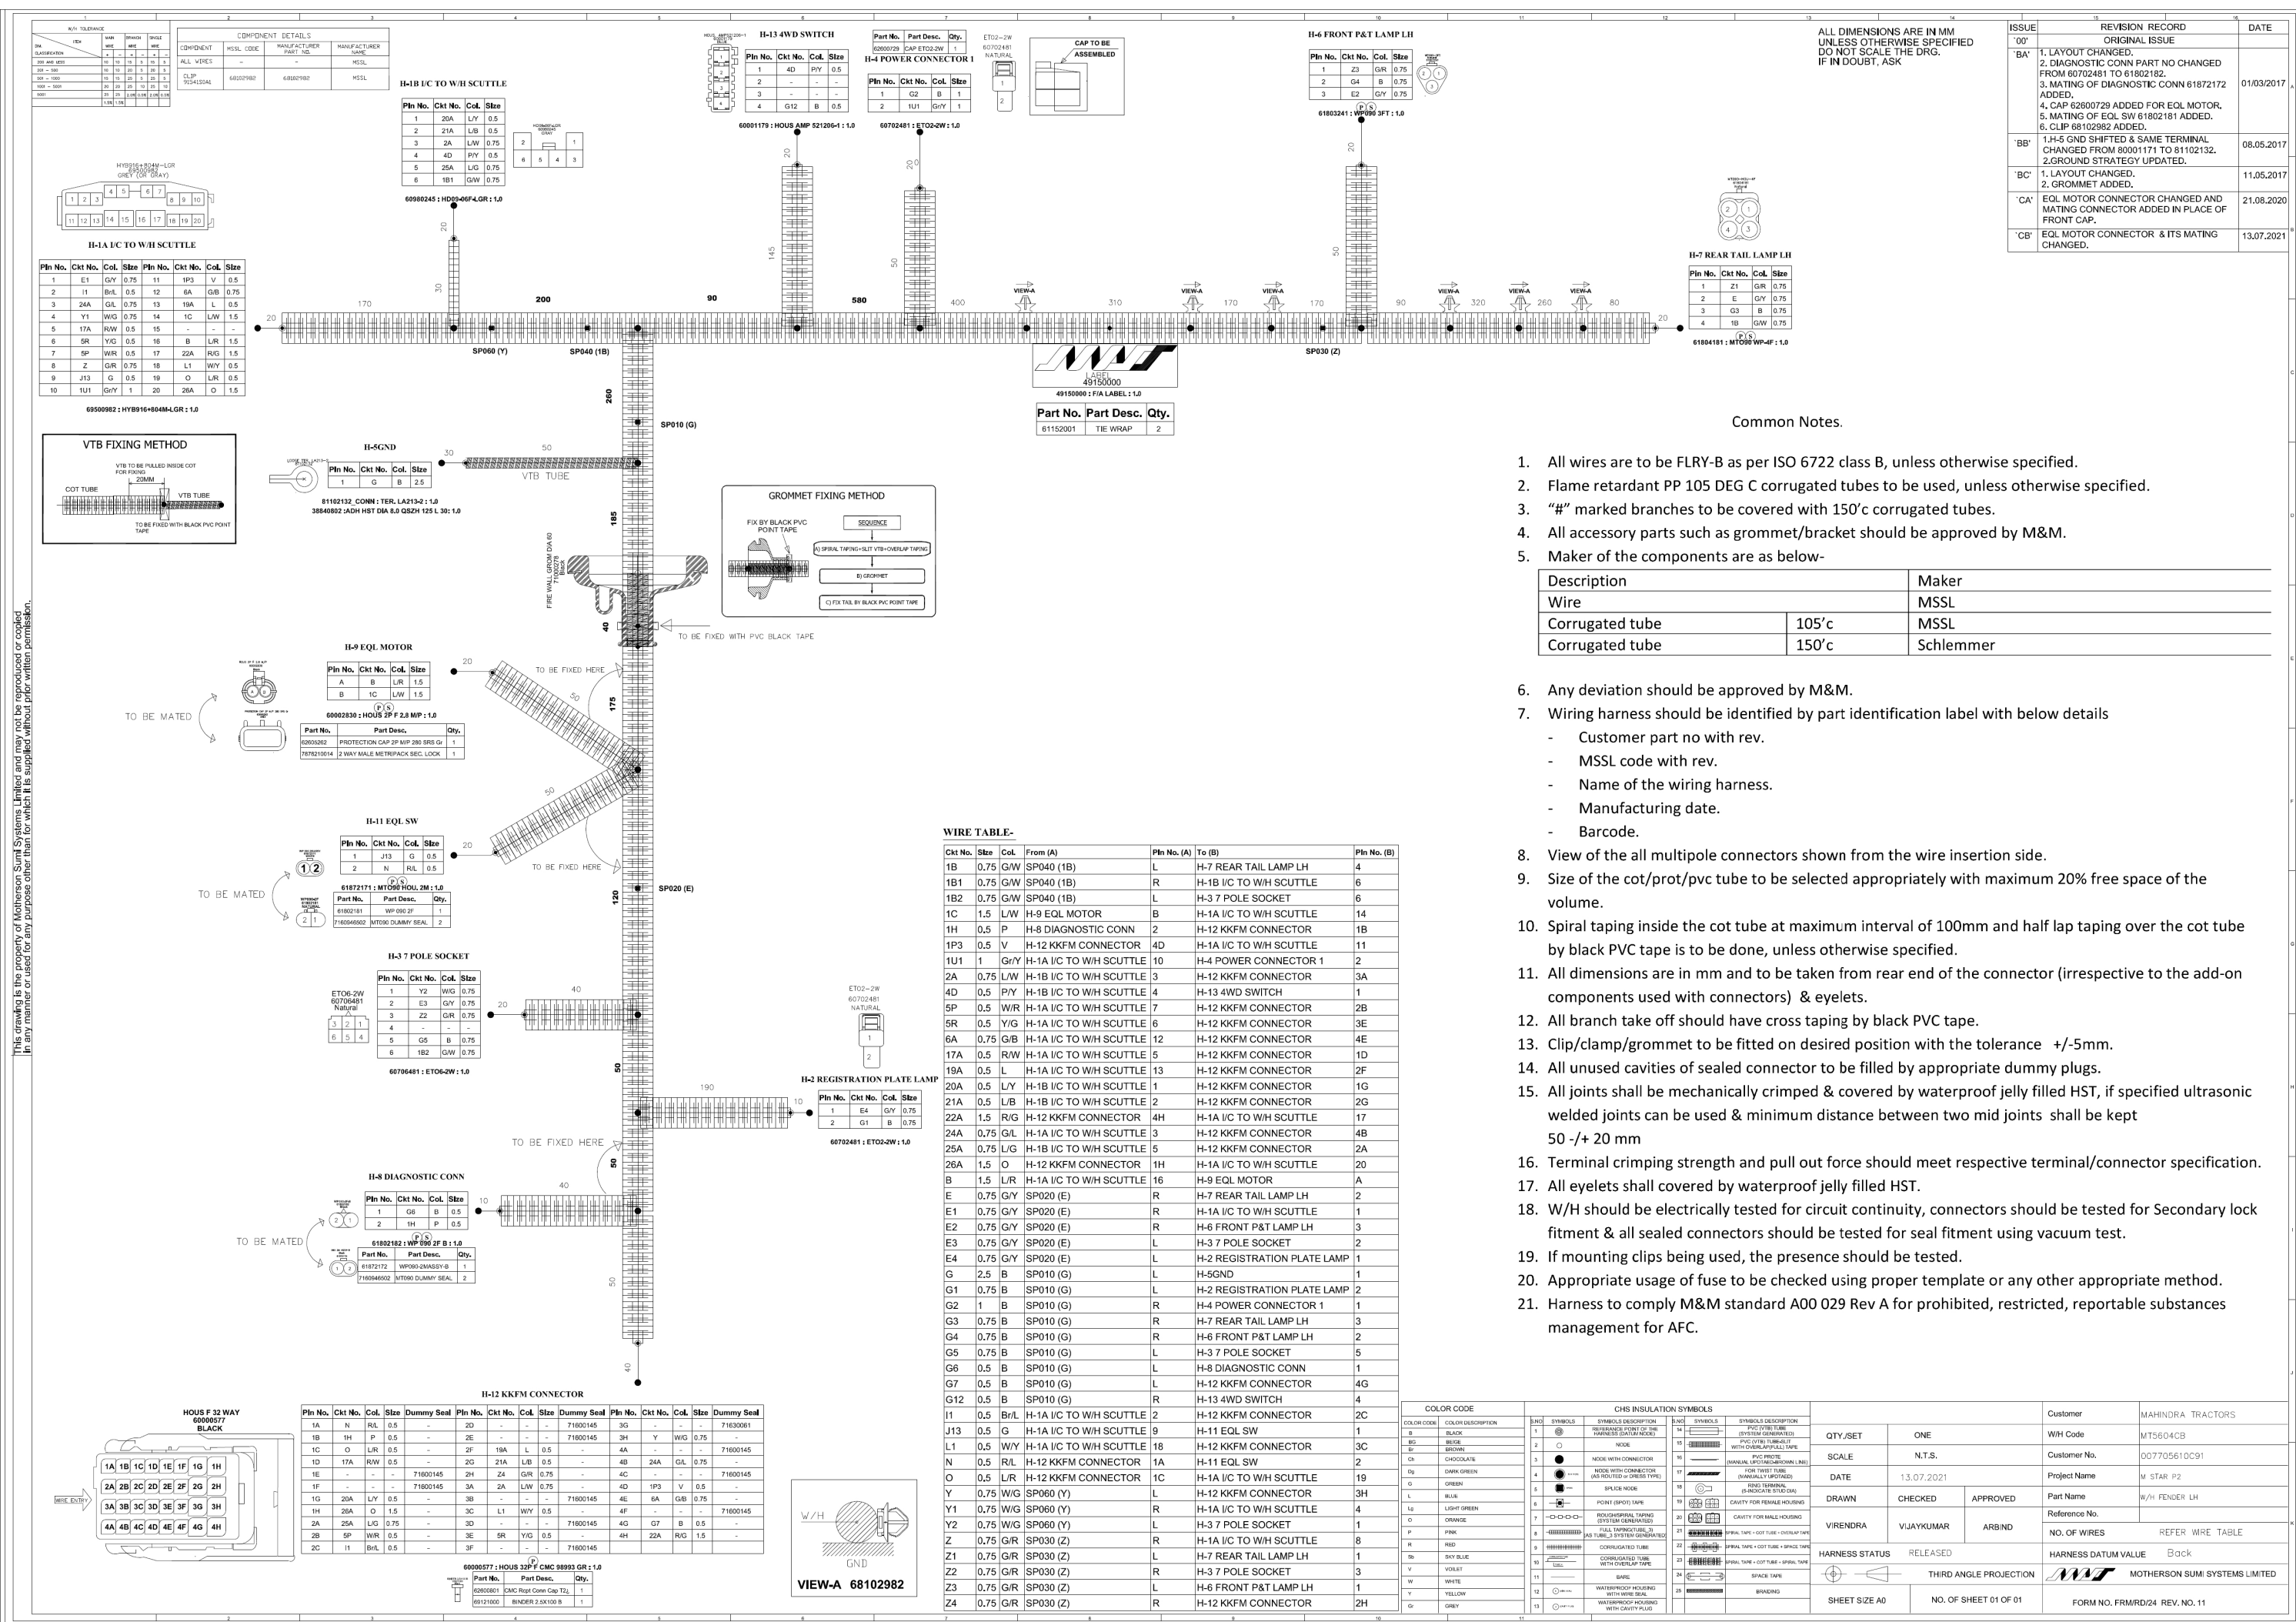

<SC> :SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS																			
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.										MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI (EAST), MUMBAI 400 101, INDIA.									
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989										E.R. / PROC.REQ.NO : ER18C0005268					PART NO. : 007705610C91				
DIMENSIONS										PART NAME : FENDER LH WIRING HARNESS									
L IN mm.										MATERIAL : --					HEAT TREATMENT : --				
OVER UPTO										NAME					SIGN				
F FINE (X,XXX)										DATE					FIRST USED TRCR. MODEL				
M MEDIUM (X,XX)										CAD ENGG.					KMK				
C COARSE (X,X)										DESIGNER					CM				
V VERY COARSE (X)										CHECKER					CM				
ANGULAR IN deg.										APPR.BY					DS				
LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.										29/06/15					29/06/15				
OVER UPTO										29/06/15					29/06/15				
F FINE (X,XXX)										SCALE					NTS				
M MEDIUM (X,XX)										SHEET 1 OF 1					UNIT QTY. : 1				
C COARSE (X,X)										WEIGHT :5.13kg.					PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.				
V VERY COARSE (X)										COMPUTER GENERATED DRAWING					DO NOT CHANGE MANUALLY				
IF IN DOUBT, ASK										DO NOT SCALE					DRG SIZE :A2				
ALL DIMENSIONS ARE IN mm.										CHECK DRG WITH LATEST CHANGE No									